

BUNN®

G9WD-RH Stainless

Weight-based, portion-control for the right amount of coffee every time with 3 batch sizes

20.68 cm x 75.69 cm x 48.26 cm



- Easy-to-clean removable front-loading hopper
- May be used as a time-based grinder
- Single hopper holds 6lb (2.72kg.) of regular, decaf or specialty coffee beans
- Weight-based, portion-control for the right amount of coffee every time, with 3 batch sizes
- BrewWISE brewer reads the information in the Smart Funnel, adjusts the recipe, and brews a perfect batch of coffee
- Create coffee recipe cards with BrewWISE recipe writer on your PC
- Four year warranty on grinding burrs
- Grinder adjusts the grind time for each batch to deliver just the right grind volumes
- Grinder communicates coffee name to the Smart Funnel during grinding process
- LCD alphanumeric display shows coffee names and diagnostics
- Precision burrs for consistent, commercial quality grind
- Tall design accommodates large brew funnels

Related products

- 05861.1002 BURR SET KIT, NEW
- 05995.0000 DECHAFFER PLATE, SPRING STEEL
- 05995.1000 DECHAFFER PLATE, SPR STL 6PK
- 11285.1000 BURR SET KIT, TURKISH GRIND
- 34444.0001 BW Recipe Writer
- 36053.0000 HOPPER PARTITION ASSY, MHG


CE

Product No	Channel	Product Category	UPC	Number of Hoppers
40700.0137	Amusement and Leisure College and University Full Service Healthcare Lodging and Hospitality Quick Serve Restaurant Specialty	Coffee Grinder	72504110622	One
Coffee Grinder Capacity Range	Removable Hopper	Finish	Number of Wires (+GND)	Cord Attached
Medium	Yes	Stainless	2	Yes
Plug Type	2D Format CAD Available	BrewWISE	Digital Brewer Control	Capacity per Hopper
UK 13A	Yes	Yes	Yes	6 lb
Machine Depth	Machine Width	Machine Height	Shipping Box Length	Shipping Box Width
48.26 cm	20.68 cm	75.69 cm	32.38 cm	57.15 cm
Shipping Box Height	Shipping Weight	Shipping Volume		

87.63 cm

30.39 kg

0.16 m³

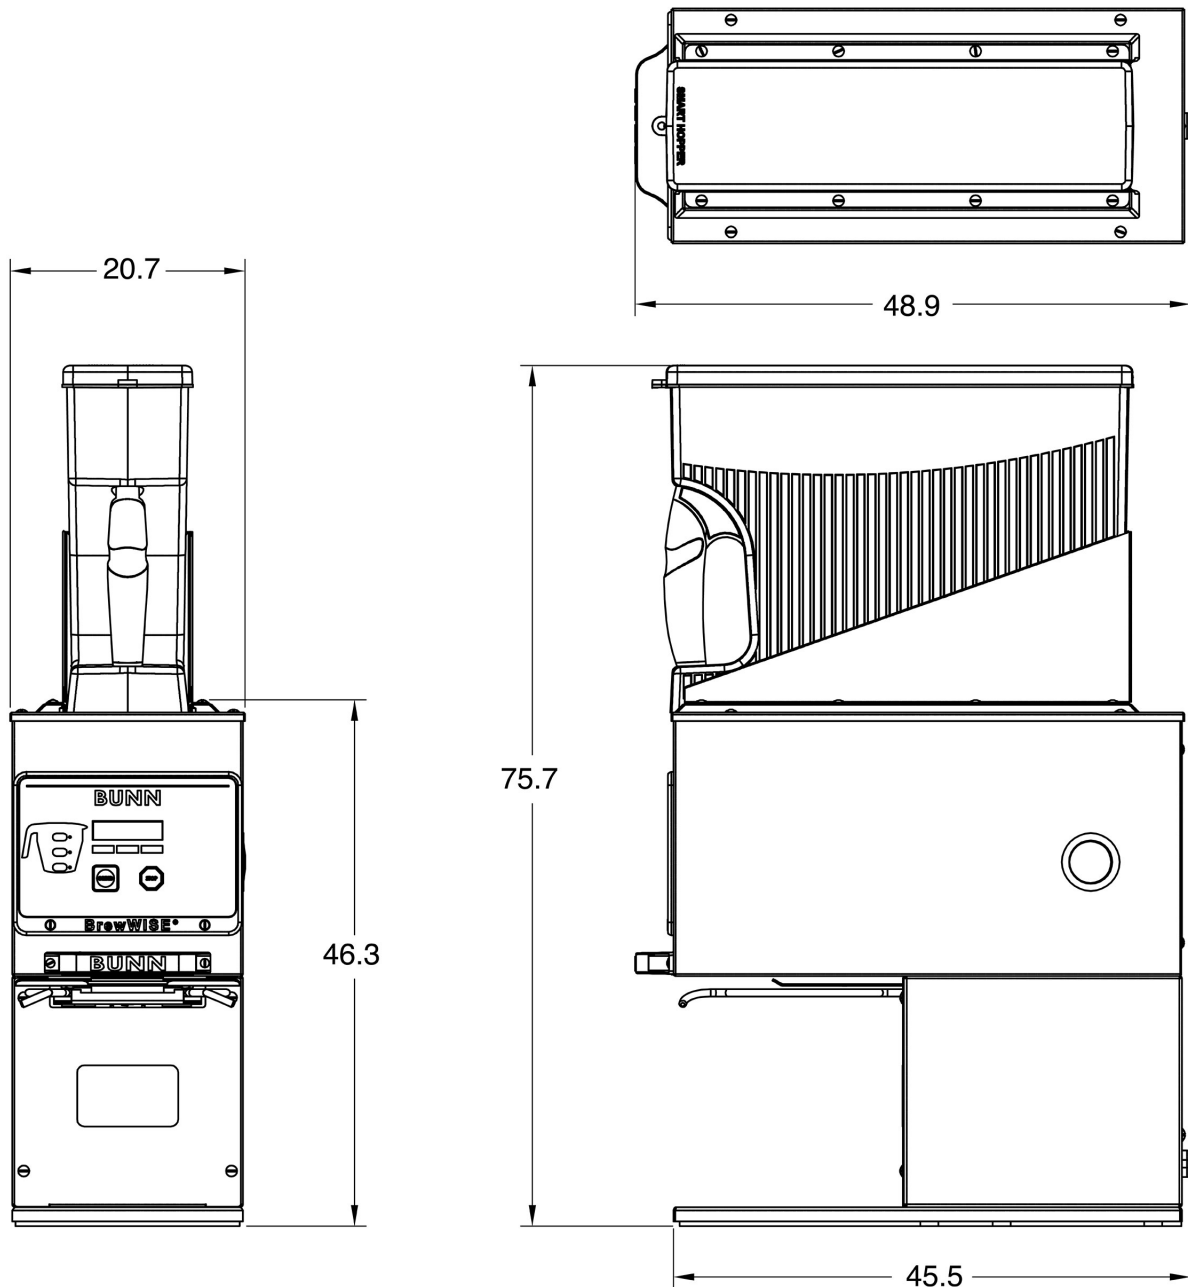

Electric & Capacity

Electrical Configuration Option

Volts-Factory Wired: 220-240

Phase-Factory Wired: 1

Watts-Factory Wired: 920

Hertz-Factory Wired: 50/60

Amps-Factory Wired: 6.5

To see illustrated parts manuals, visit bunn.com/support/manuals

BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com. All dimensions shown in inches.